

5 Minute Morticer

INCLUDES
FASTER CARBIDE
CUTTER. FOR
WOOD
MORTICING



ST2 - ST3 MORTICER

ST4 - ST5 ACCESSORIES




Perfect lock fitting every time with the DBB Morticer

Used and acclaimed by locksmiths and builders alike, the DBB morticer has proved itself an invaluable tool for anyone regularly fitting mortice locks.

Features

- Cuts a mortice for the body and face-plate.
- Fast and accurate, saves you time and money.
- Carbide wood cutters.
- The self-centring jig cuts marking-up time.
- Vertical guides, height and depth stops mean that you cannot overrun the cut area.

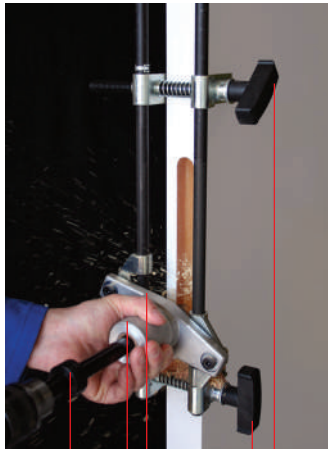

JIG1 **U/Price: 3900.00**



- Top clamp and height stop
- Bottom clamp and lower stop
- Self-centring housing
- Shaft with depth stop
- Use a power drill (not included) with a 1/2" chuck and running speed of 2,000 - 3,000 rpm



The side slide attachment for offset morticing

Available as a complete kit, or as an upgrade for your standard morticer, this attachment has been developed for European-style rebated doors with off-centre lock mortices.

Using the same vertical bar & clamp system, the attachment has a side sliding shaft housing, so that mortices can be cut off-centre.

This flexibility allows you to cut hinge recesses and the mortice for the strike plate on door frames less than 95mm thick.



JIG2 **U/Price: 4500.00**

New Version Morticer

Complete Morticer

Description

Code No.

Standard Morticer complete with 3 carbide cutters (CWB19, CWB22 & CWB25)

JIG1

Offset Morticer complete with 3 carbide cutters (CWB19, CWB22 & CWB25)

JIG2



Long Drill Kit

The LONG DRILL KIT has been specifically designed for the easy installation of electric lock cables through wooden doors, from lock to hinge. After cutting the lock mortice, the long drill adapter kit converts a morticer into a guide for a long drill system. Special geometry helps to keep the drill 'on line' with minimal effort.

Leading in its field, the LONG DRILL KIT is quick, accurate and easy to use.

Description	Code No.
Long Drill Adapter	DBB/LD/A
10mm x 950mm long, wood drill	10950
10mm x 1250mm long, wood drill	101250



Long Drill Kits


U/Price: 450.00



Long Drill Adapter

101250 U/Price: 900.00

10950 U/Price: 675.00

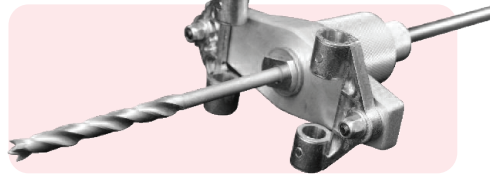

Long Drill Adapter installed on housing

Additional and special accessories

Any part of the morticer can be replaced individually and in addition we can offer 14 sizes of wood cutters, four sizes of aluminium and plunging cutters and the special kits for non-standard locks and applications.



Aluminium Cutters

DBB/DS

U/Price: 131.00



JIG/SS U/Price: 354.00

JIG/LS U/Price: 463.00

Depth Stop

Standard Shaft

Long Shaft


Aluminium Cutters

Description	Code No.
16.2mm (5/8")	NAB16
19.0mm (3/4")	NAB19
25.4mm (1")	NAB25
31.8mm (1 1/4")	NAB32



Aluminum Slider

Slider Repair Kit



Grub Screws

Allen Key

DBB/SRK U/Price: 250.00

DBB/GS U/Price: 35.00

Accessories

Carbide Tipped Mortice Cutters

Description	Code No.		Description	Code No.	
16.2mm (5/8")	CWB16	RM484.00	23.0mm	CWB23	RM530.00
17.5mm (11/16")	CWB18	RM484.00	23.8mm (15/16")	CWB24	RM530.00
19.0mm (3/4")	CWB19	RM484.00	25.4mm (1")	CWB25	RM530.00
20.0mm	CWB20	RM499.00	27.0mm (1/1/16")	CWB27	RM624.00
20.6mm (13/16")	CWB21	RM499.00	28.6mm (1/1/8")	CWB29	RM702.00
22.2mm (7/8")	CWB22	RM499.00	31.8mm (1/1/4")	CWB32	RM780.00

Carbide Tipped
Mortice Cutters



Plunging Cutters

These new cutters are ideal for installers who need perfectly drilled true holes. Ideal for the quick installation of Tubular Latches, Deadbolts, Concealed Door Closers etc. The range of 4 sizes of 'Plunging Cutters' are designed for locks where perfect installation is an issue. Made from High Speed Steel, these very effective 3 point plunging drills are a real bonus for those wanting to solve installation problems.

Plunging Cutters

Description	Code No.
17.6mm	PD18
19.0mm	PD19
25.4mm	PD25
29.0mm	PD29



Plunging Cutters

U/Price: 312.00

Technical Data

- Drill requirements - 13mm (1/2") Chuck, recommended speed 2,000 - 3,000rpm
- Standard shaft depth - 90mm (100mm without stop)
- Long shaft depth - 170mm (180mm without stop)
- Door thickness Standard Morticer - max opening 55mm
- Door thickness Standard Morticer with DBB/HK/S
- Special Housing - max - opening 80mm
- Door and Frame Width Offset Morticer - max opening 95mm

